


# WiFi Solution

## SV-WHD1FB

### Network WiFi Bullet HD Camera



#### Dimension Unit : mm

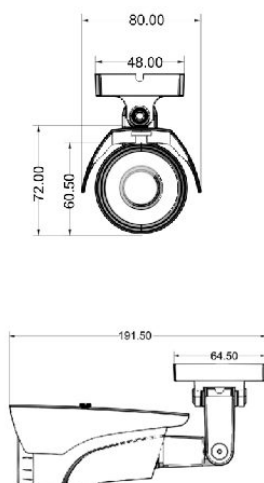

- H.264 Advanced Compression
- Digital Noise Reduction.
- 720P Realtime Transmission.
- Support P2P Mobile View
- 25 Meters IR Distance
- 1/3" 3518C Image Sensor
- Built-in IR Cut Removable
- Class IP67 Weatherproof
- Aluminum Alloy Housing for Better Heat Dissipation.

#### Specifications

|                       |                                                                          |
|-----------------------|--------------------------------------------------------------------------|
| Model                 | SV-WHD1FB                                                                |
| Compression method    | H.264                                                                    |
| Triple streaming      | S1 : 1280x720 @ 30 FPS<br>S2 : 720x576 @ 30 FPS<br>S3 : 312x288 @ 30 FPS |
| Bit Rate              | CBR: 64K~12M bps / VBR: 3 Levels                                         |
| Stream transmission   | CBR / VBR                                                                |
| LAN Port              | Ethernet (10/100Base-T), RJ 45 connector                                 |
| Protocol              | TCP/UDP/HTTP/DHCP/UPnP/RTSP/RTCP/RTSP/NTP/HTTPS/PPPOE/DAS/WiFi           |
| Web Application       | Internet Explorer / IOS, Android / Cloud Service                         |
| Pick up device        | 1/3" HI3518+OV9712                                                       |
| Electronic Shutter    | 1/10 ~ 1/100000, 750 sec.                                                |
| Camera Setting        | Exposure, Day & Night, AGC, Shutter                                      |
| ICR                   | Switchable                                                               |
| IR distance           | 25.M                                                                     |
| Lens Type             | Wide Angle: 3.6mm                                                        |
| Picture-Effect        | Mirror / Flip / Motion / Anti Flicker                                    |
| Snap Shot             | Timing, Alarm, Detect                                                    |
| Picture Adjust        | Brightness / Saturation / Contrast / Sharpness                           |
| Intelligent Alarm     | Perimeter Alert (Warning Area)                                           |
| Alarm                 | Per Channel & Region                                                     |
| Power Source          | DC12V (1A)                                                               |
| Operating Temperature | -20°C ~ -55°C / Humidity: 0% ~ 90%                                       |
| Storage Temperature   | -20°C ~ -55°C                                                            |
| Dimension             | 80(W) x 72(H) x 191(D) mm                                                |
| Weatherproof          | IP 67                                                                    |