

IP Solution

SV-NHD63VP

Sony Starvis Network Camera




Network Function

- 3072x2048P Resolution
- Virtual Reality Modes
- NVR& Mobile VR Support
- Remote View Browser Function
- High Gain DOL HDR
- Network& CVBS outputs
- VMS User Interface

Hardware Specification

- Sony Starvis IMX178
- Two way Audio
- Fisheye 360 Degrees Panorama and PTZ Mode
- 128G Micro SD Storage
- Low Lux Star Light Vision

Dimension Unit : mm

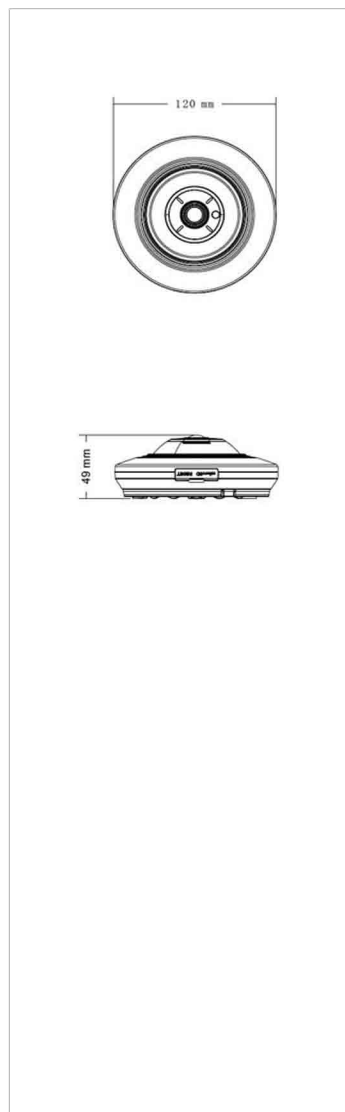

Specification

Model	SV-NHD63VP
Compression method	H264, JPEG, AVI
Streaming	Fisheys, Panorama, PTZx3 : Max 2048x1536P Fisheye, PTZx4 : Max 3072x2048P Fisheye, Panorama : Max 2048x2048P
Pick up device	Sony Starvis IMX178 (6.4MP)
Stream transmission	CBR/ VBR
LAN Port	Ethernet (10/100 Base-T), RJ45 connector
Protocol	TCP/ICMP/HTTP/HTTPS/DHCP/RTP/RTCP/RTSP/NTP/DNS/DDNS/SMTP
Application	iPhone, iPad, Android, Android Pad
IE Browser	IE8~ 11, Chrome, Firefox, Safari, Mac
Electronic Shutter	1/25 ~ 1/10000 sec. (High Light, low Light Performance)
PoE Built-In	802.3 af
ICR, Min illumination	CDS < 10 Lux, 0.05 Lux
Audio, Storage	Two way, 128G Micro SD
Lens Type	1.6 mm Fisheye (360/180 Degrees ceiling/wall mount)
Picture-Effect	Motion/ Mask/ Mirror/ 3D NR/BLC/ FLK
WDR, HDR Gain	120. db (Digital Overlap HDR)
Picture Adjust	Brightness/ Saturation/ Contrast/ Sharpness
IR LED	42 x 3.pcs (20 meters beam)
Recording Mode	NVR, NAS, CMS, WEB
Language	Multi Regional
Power	DC12V (1.A)/ PoE
Operating Temperature	-20°C ~ +60°C/ Humidity: 0% ~ 95%
Dimension	120x49 mm (Diameter)
Weight, Enclosure	500 g, (Metal body, Plastic bracket)